



ALR 11000 ZHAGA DIGITAL PHOTOCCELL

Streetlight Digital Photocell

ALR 11000 photocell is a digital photocell designed for streetlighting. The ALR 11000 photocell while having the functionality of a simple on/off photocell also has the capability to dim the light source during preset hours of the dark period which helps reducing energy consumption and utility spend.

ALR 11000 photocell will fit into the Zhaga-D4i ecosystem, the new standard in smart cities. Working as a standalone control device or in combination with a Zhaga-D4i motion sensor. The device monitors ambient light levels to switch the driver's output on, off and dim using the D4i protocol.

The photocell sensor is a pluggable device, with the standard Zhaga Book 18 interface.

BENEFITS

- A proprietary algorithm allows for a virtual midnight to be defined within ± 15 mins, without the use of an expensive GPS radio
- A multistage profile allows different dimming levels at different times of the dark period, helping to maximize energy savings
- Compatible with all Zhaga-D4i certified luminaires
- Ultra-compact size for great aesthetics and design freedom for decorative and heritage luminaires
- 10-year design life

ALR 11000 ZHAGA DIGITAL PHOTOCELL

FEATURES

- Form factor: Zhaga Book 18
- On: 35lux, Off: 18lux
(other values available upon request)
- Delay time: 25secs
- Operating voltage: 24Vdc $\pm 10\%$
- Operating temperature range: -40°C to $+80^{\circ}\text{C}$
- Relative humidity: 90%
- Time reference stabilization: <3 days
- Communication protocol: D4i
- IP66
- IK09
- Compatible with LUMAWISE Motion sensor

APPLICATIONS

- Street lighting
- Area lighting
- Rail-station lighting
- Park and walkway lighting

MECHANICAL

- Height: 29mm
- Diameter: 48mm

ELECTRICAL

- Power consumption: 0.3W average, 0.5W max
- Powered from the 24Vdc AUX supply



MATERIALS

- Dome: UV stabilized polycarbonate
- Base: PBT

Dimming schedule (other values available upon request)	100%	Dusk (35Lux) - 00:00
	50%	00:00 - 05:30
	100%	05:30 - Dawn (18 lux)


STANDARDS

- Zhaga-D4i, Book 18
- DALI Parts 101, 103, 351
- UL773
- CE and UKCA Marked

DOCUMENTATION

- Design objectives/specification: [108-160585](#)
- Application specification: 114-160641

PRODUCT VIEW

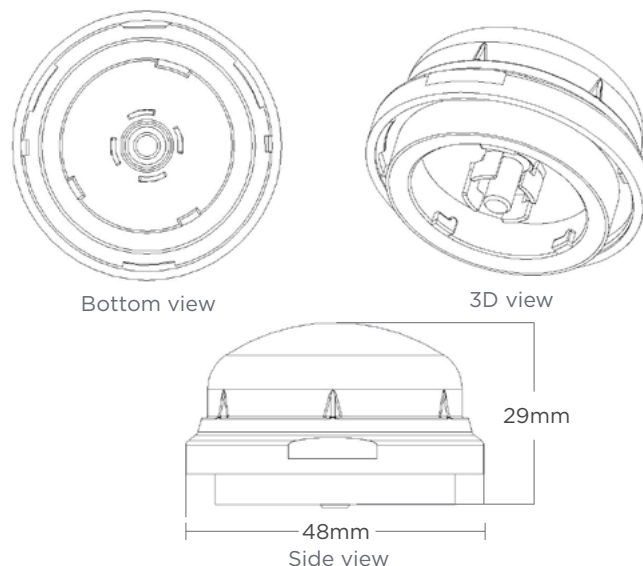


PRODUCT INFORMATION

Part number	Part description
2410739-1	ALR-11000, DALI LUMAWISE S PHOTOCCELL, A
2410739-2	ALR-11000, DALI LUMAWISE S PHOTOCCELL, B
2410739-3	ALR-11000, DALI LUMAWISE S PHOTOCCELL, C
2410739-4	ALR-11000, DALI LUMAWISE S PHOTOCCELL, D
2410739-5	ALR-11000, DALI LUMAWISE S PHOTOCCELL, P
2410739-6	ALR-11000, DALI LUMAWISE S PHOTOCCELL, Q
2410739-7	ALR-11000, DALI LUMAWISE S PHOTOCCELL, F
2410739-8	ALR-11000, DALI LUMAWISE S PHOTOCCELL, J
2410739-9	ALR-11000, DALI LUMAWISE S PHOTOCCELL, H

ALR 11000 ZHAGA DIGITAL PHOTOCCELL

Astro clock zone map reference for Western Europe, for more accurate and other regions please [contact product and customer support](#).

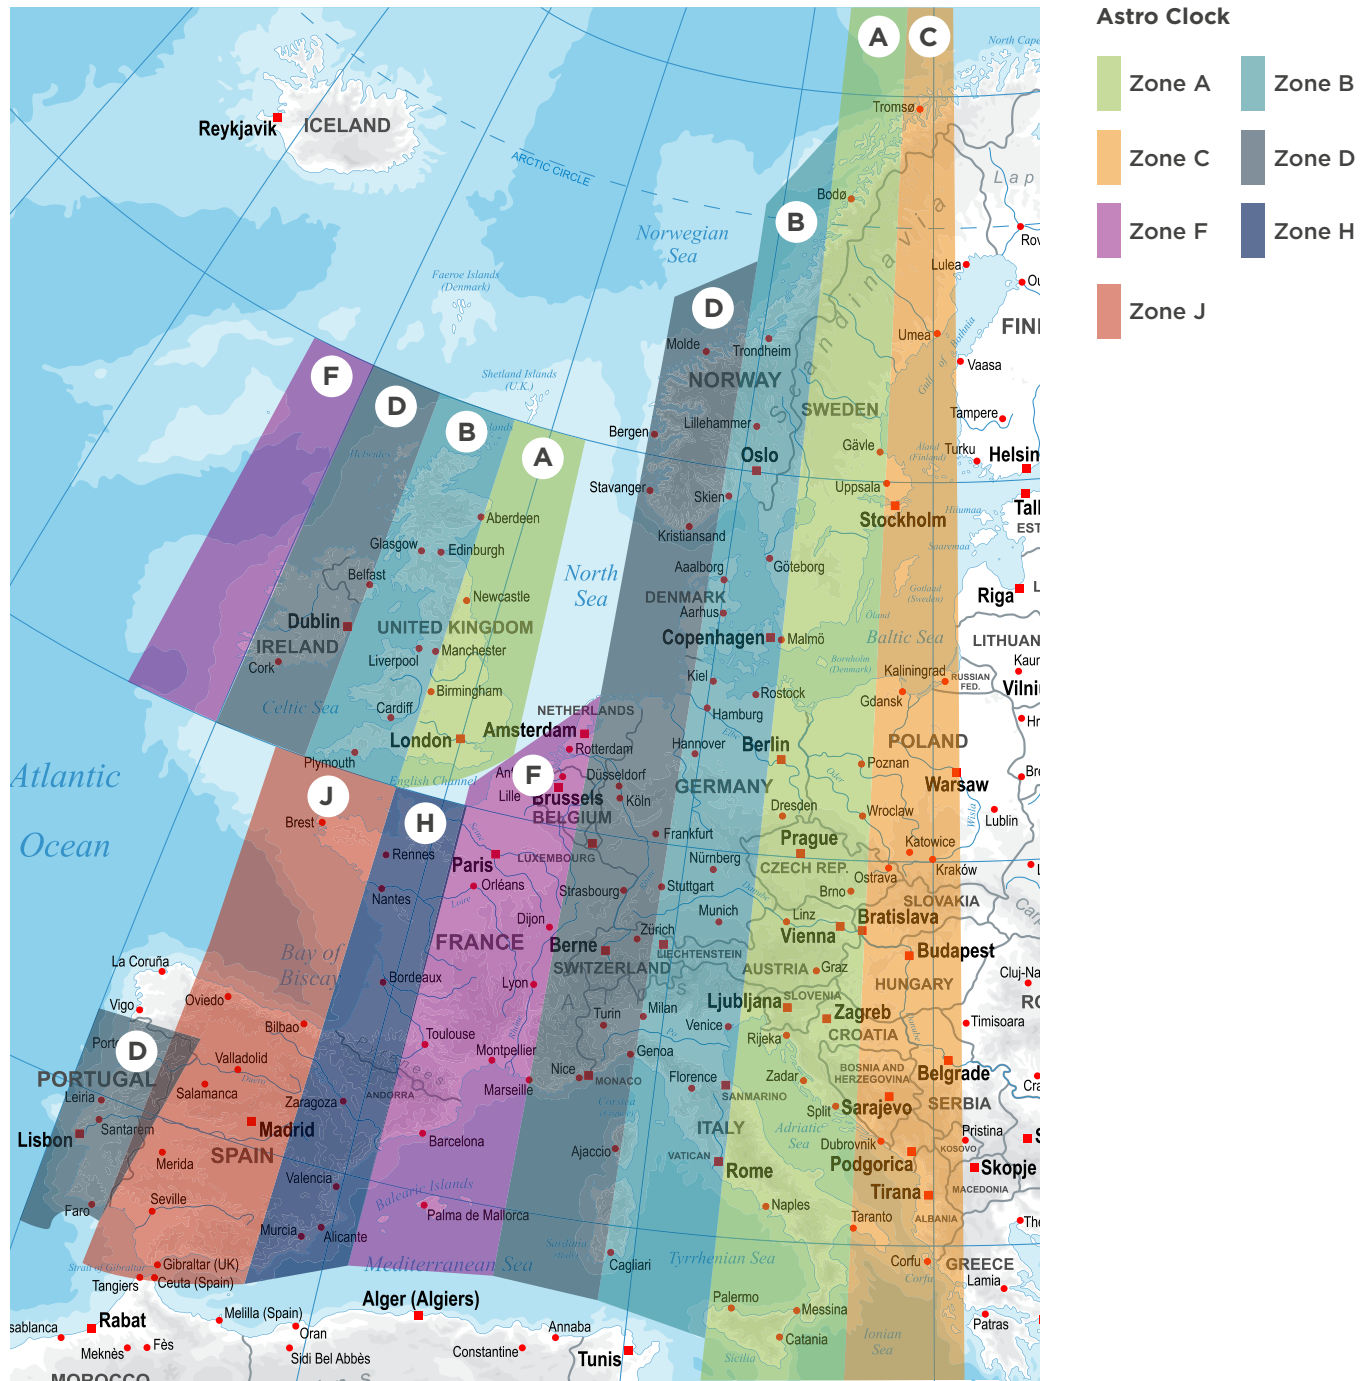

Connect With Us

We make it easy to connect with our experts and are ready to provide all the support you need.
Visit te.com/support to chat with a Product Information Specialist.

te.com/street-lighting-photocells

TE Connectivity, TE, TE connectivity (logo), LUMAWISE and EVERY CONNECTION COUNTS are trademarks owned or licensed by the TE Connectivity plc family of companies. All other logos, products and/or company names referred to herein might be trademarks of their respective owners.

While TE has made every reasonable effort to ensure the accuracy of the information in this document, TE does not guarantee that it is error-free, nor does TE make any other representation, warranty or guarantee that the information is accurate, correct, reliable or current. TE reserves the right to make any changes to the information contained herein without prior notice. TE Connectivity assumes only those obligations set forth in the terms and conditions for this product and shall in no event be liable for any incidental, indirect, or consequential damages arising out of the sale, resale, use, or misapplication of the product. TE expressly disclaims any implied warranties with respect to the information contained herein, including, but not limited to, implied warranties of merchantability or fitness for a particular purpose. Dimensions, specifications and/or information contained herein are for reference purposes only and are subject to change without notice. Consult TE for the latest dimensions, specifications and/or information. Users of TE Connectivity products must make their own assessment as to whether the respective product is suitable for the respective desired application.

© 2025 TE Connectivity. All Rights Reserved

05/25