


MINI AMP-IN TERMINALS & CONNECTORS


QUICK REFERENCE GUIDE

Board-in printed circuit board (PCB) terminals and low profile gang insertion wire-to-board connectors designed for space efficient PCB assembly

MINIATURE AMP-IN TERMINALS



LOW PROFILE MINIATURE AMP-IN CONNECTORS



MINIATURE AMP-IN TERMINALS

TE Connectivity (TE)'s miniature AMP-IN terminal is designed not as an electrical terminal but as a mechanical holding device to enhance soldering of hookup wires to printed circuit boards. The combination of terminal and application tooling significantly reduces costly manual preparation of wires prior to soldering, and positions the wire to achieve reliable solder joints. Movement of the wire during soldering is restricted, assuring proper solder flow.

PRODUCT FEATURES

- Terminal locking lance holds wire in PCB for flow soldering
- Insulation support provides strain relief for wire and protection of solder joint
- Available for 26-10 AWG [0.15-5.5mm²]
- Type A terminals will provide both a positive board stop and positive insulation stop
- More secure supply-chain helps ensure reliable product availability

PRODUCT SPECIFICATIONS

- [108-1081](#) AMP-IN Contact, Miniature
- [108-106642](#) Mini AMP-IN Contacts, Type F

APPLICATION SPECIFICATIONS


- [114-1016](#) Mini AMP-IN Contacts
- [114-106642](#) Mini AMP-IN Contacts, Type F

CERTIFICATIONS & COMPLIANCE


- UL_E13288_20220718 (For Mini AMP-IN Contacts, Type F)
- ROHS, REACH compliance




DIMENSIONS

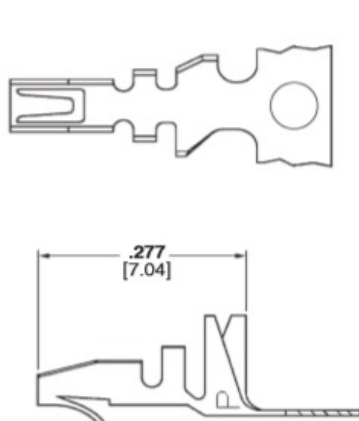


TYPE A
PROVIDE BOTH A POSITIVE BOARD
STOP AND POSITIVE INSULATION STOP

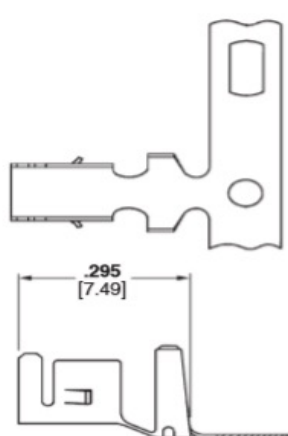


TYPE B

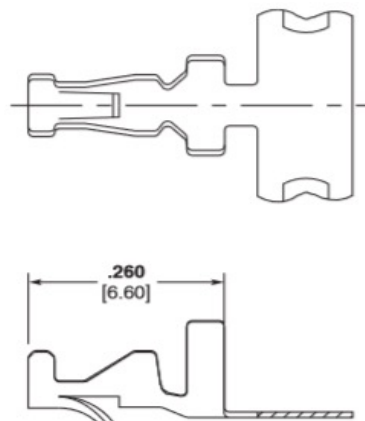


TYPE C

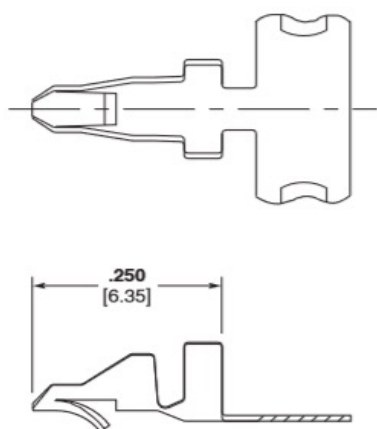

TYPE D

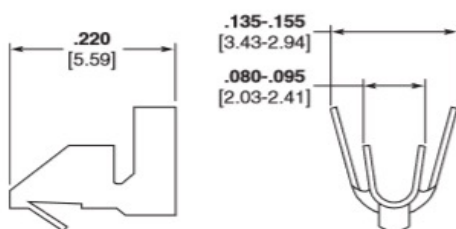

TYPE E

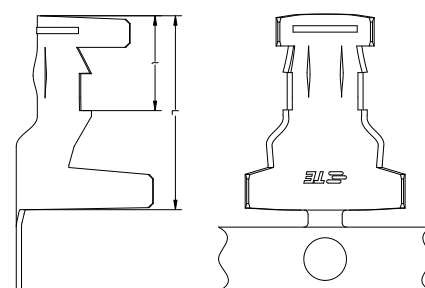

PN	L(mm/in.)	l(mm/in.)
2393237	9.2/.362	4.5/.177
2393227	8.3/.327	4.4/.173
2393222	8.3/.327	4.3/.169
2393199	7.6/.299	4.1/.161
2393261	7.6/.299	4.1/.161

TYPE F

MINIATURE AMP-IN TERMINALS

Type	Wire size Range		Insulation Diameter (mm)	Board Hole Diameter (mm)	Extension Below Board (mm)	Terminal Part Nos. (Strip Form)
	AWG	mm ²				
A	22-18	0.3-0.9	1.52-2.79	1.83±0.08	2.54	3-794121-1
	26-22	0.12-0.4	1.02-2.79	1.40±0.10	2.54	3-794122-1
B	18-14	0.80-2.0	2.29-3.81	3.18±0.08	3.18	3-770060-1
	12	3	2.29-3.81	3.18±0.08	3.18	3-794013-1
	12	3	5.08	3.18±0.08	3.18	3-794037-1
	10	5.5	5.08	3.76 ±0.08	3.18	3-794037-1

Type	Wire size Range		Insulation Diameter (mm)	Board Hole Diameter (mm)	Extension Below Board (mm)	Terminal Part Nos. (Strip Form)
	AWG	mm ²				
C	22-18	0.4-0.8	1.52-2.79	1.85±0.10	2.54	3-640311-1
	26-22	0.15-0.4	1.02-2.54	1.40±0.10	2.54	3-640401-1
D	22-18	0.4-0.8	1.52-2.79	1.85±0.10	3.18	3-350566-1
	26-22	0.15-0.4	1.52-2.54	1.40±0.10	3.43	3-640108-1
	26-22	0.15-0.4	1.02-1.78	3.18±0.08	3.18	3-640663-1
D	22-18	0.4-0.8	1.52-2.79	1.85±0.10	3.18	350566-7
D	26-22	0.15-0.4	1.02-1.52	1.28 ± 0.08	2.5	925819-3
D	22-18	0.4-0.8	1.52-2.79	1.85±0.10	3.18	350566-3
E	22-18	0.8-0.4	1.52-2.79	1.83±0.08	2.29	3-770565-2
E	22-18	0.8-0.4	1.52-2.79	1.83±0.08	2.29	3-770565-1
F	26-22	0.14-0.34	1.02-2.5	1.85±0.05	2.35	2393261-1
F	22-18	0.34-0.85	1.5-3.0	1.85±0.05	2.35	2393199-1
F	18-16	0.85-1.32	2.8-3.4	2.40±0.05	2.55	2393222-1
F	14	2.08	3.4-3.8	2.55±0.05	2.65	2393227-1
F	12	3.29	4.0-4.2	3.55±0.05	2.75	2393237-1

LOW PROFILE MINIATURE AMP-IN CONNECTORS

TE's Low profile Miniature AMP-IN connectors provide an easy means of gang inserting leads into printed circuit boards (PCBs). The design of the crimp snap-in contact aids in locating the PCB hole and inserting the contact into that hole. The low profile housing allows compactness of leads while providing insulation between them to prevent short-circuits.

PRODUCT FEATURES


- Connector housing provides gang insertion into PCB
- Housing insulates and provides short-circuit protection between contacts
- Low mating height with .200in. [5.08mm] low profile design
- Housings are available in 2 thru 15 positions for .079in. [2.01mm] and 2 thru 20 for .098in. [2.49mm] centerline spacing
- Contacts available for 30-26 AWG [0.05-0.15mm²] and 26-22 AWG [0.15-0.4mm²]

PRODUCT SPECIFICATIONS

- [108-5163](#) Low Profile, Mini AMP-IN Header, Crimp Type

APPLICATION SPECIFICATIONS

- [114-5062](#) Crimping of Mini AMP-IN Terminals

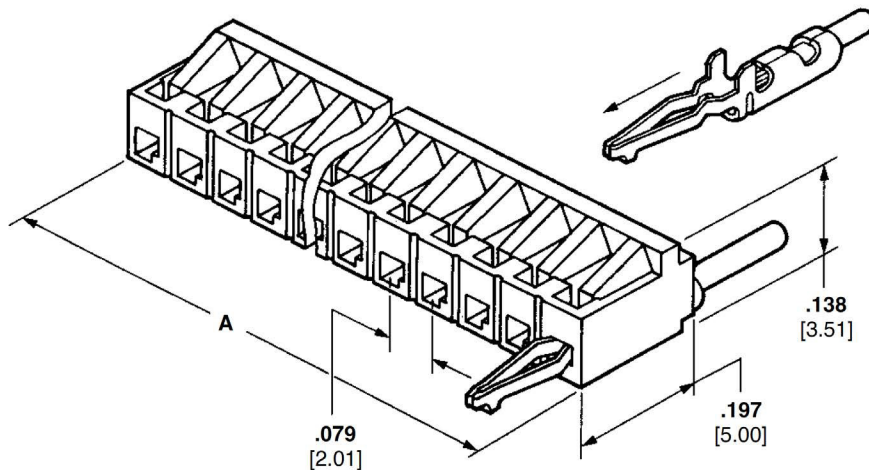

NEXT GENERATION ECONOMY POWER 2.5 CONNECTOR

LOW PROFILE MINIATURE AMP-IN CONNECTORS

TERMINALS

Wire Size Range		Insulation Diameter (mm)	Hole Diameter (mm)	Material and Finish	Contact Part No. (Strip Form)	Hand Tool Part Nos.
AWG	mm ²					
30-26	0.05-0.15	1.10-1.40	1.00	Brass / Tin	172781-4	755405-1
26-22	0.15-0.4	1.40-1.50	0.80	Brass / Tin	172782-5	755405-1
		1.40-1.50	1.00	Brass / Tin	172782-7	

HOUSINGS

No of Positions	2mm Centerline		2.5mm Centerline	
	A (mm)	Part Nos.	A (mm)	Part Nos.
2	4.80	172890-2	5.99	172520-2
3	6.81	172890-3	8.51	172520-3
4	8.79	172890-4	11.00	172520-4
5	10.80	172890-5	13.51	172520-5
6	12.80	172890-6	16.00	172520-6
7	14.81	172890-7	18.52	172520-7
8	16.79	172890-8	21.01	172520-8
9	18.82	-	23.52	172520-9
10	20.83	-	26.01	1-172520-0
11	-	-	28.52	1-172520-1
12	24.82	1-172890-2	31.01	1-172520-2
13	-	-	33.53	1-172520-3
14	-	-	36.02	172520-4

Connect With Us

We make it easy to connect with our experts and are ready to provide all the support you need.

Visit te.com/support to chat with a Product Information Specialist.

[te.com/mini-amp-in-board-in-terminals](#)

TE Connectivity, TE and TE connectivity (logo) are trademarks owned or licensed by the TE Connectivity plc family of companies. All other logos, products and/or company names referred to herein might be trademarks of their respective owners.

While TE has made every reasonable effort to ensure the accuracy of the information in this document, TE does not guarantee that it is error-free, nor does TE make any other representation, warranty or guarantee that the information is accurate, correct, reliable or current. TE reserves the right to make any changes to the information contained herein without prior notice. TE Connectivity's obligations shall only be as set forth in TE Connectivity's Standard Terms and Conditions of Sale for this product and in no case will TE Connectivity be liable for any incidental, indirect, or consequential damages arising out of the sale, resale, use, or misapplication of the product. TE expressly disclaims any implied warranties with respect to the information contained herein, including, but not limited to, implied warranties of merchantability or fitness for a particular purpose. Dimensions, specifications and/or information contained herein are for reference purposes only and are subject to change without notice. Consult TE for the latest dimensions, specifications and/or information. Users of TE Connectivity products must make their own assessment as to whether the respective product is suitable for the respective desired application.

© 2025 TE Connectivity. All Rights Reserved.

08/25