



DATA CONNECTIVITY INSPECTION MACHINE VIM-100

Product Brochure

DATA CONNECTIVITY INSPECTION MACHINE VIM-100

Our new data connectivity inspection machine VIM-100 automatically checks the insertion depth of terminals while detecting concentricity, and shell deformation within data connectivity and wire & harness applications. The automatic rotation mechanism with center interference detection for quick and accurate positioning and 10-mega pixel cameras provide high detection accuracy. The pattern learning-based concept supports the detection of different products while incorporating the end customer's testing programs. In the event of a cable quality issue, our machine will mark the cable while being inspected. Our high-performance machine includes two separate workstations. The continuous process operation allows for more product in less amount of time compared to a machine with one single heating chamber. End and in-line shrinking capabilities are also offered. This machine can offer flexible configurations covering different inspection requirements for a large breadth of products and can easily extend to future data connectivity products. This cost-effective, one-machine solution can cover full ranges of both coaxial and differential products while enabling a quick changeover time of less than 15 minutes.



Quality Management



High Performance



Flexible Configuration



Cost Effective

Key Benefits	Advantages
Quality Management	<ul style="list-style-type: none">Telecentric lens and 10-mega pixel cameras provide high detection accuracyThe pattern learning-based concept supports the detection of different products while incorporating the end customer's testing programs<ul style="list-style-type: none">Detects housing deformation appearance, concentricity, depth, cable color, etc.If there is a cable quality issue our machine will mark the cable while being inspected
High Performance	<ul style="list-style-type: none">Automatic rotation mechanism with center interference detection for quick and accurate positioning
Flexible Configuration	<ul style="list-style-type: none">Covers different inspection requirements for a large breadth of productsCan easily extend to future data connectivity productsCustomer can select one or two stations, based on their volumeCan be used as a standalone machine, or in production line with our multi-station processing system (MSPS)
Cost Effective	<ul style="list-style-type: none">One machine solution to cover full ranges of coaxial and differential productsQuick changeover time is less than 15 minutes

Industries

- Automotive
- Industrial & Commercial Transportation


Applications

- Data connectivity
 - Systems
 - Infotainment
 - Safety
 - In-vehicle networks

Technical Details

Technical Specifications	
Dimension	600 mm X 600 mm X 870 mm (W X D X H)
Weight	Ca. 149 Kg
Power	AC 220V, Single Phase, 50/60Hz
Air	0.5-0.6MPa
Cycle	3.3s-4.5s Decided by the angle of cable.
Camera Resolution	10 Mega Pixel
Lens	Telecentric lens

Machine Overview (MATE-AX)

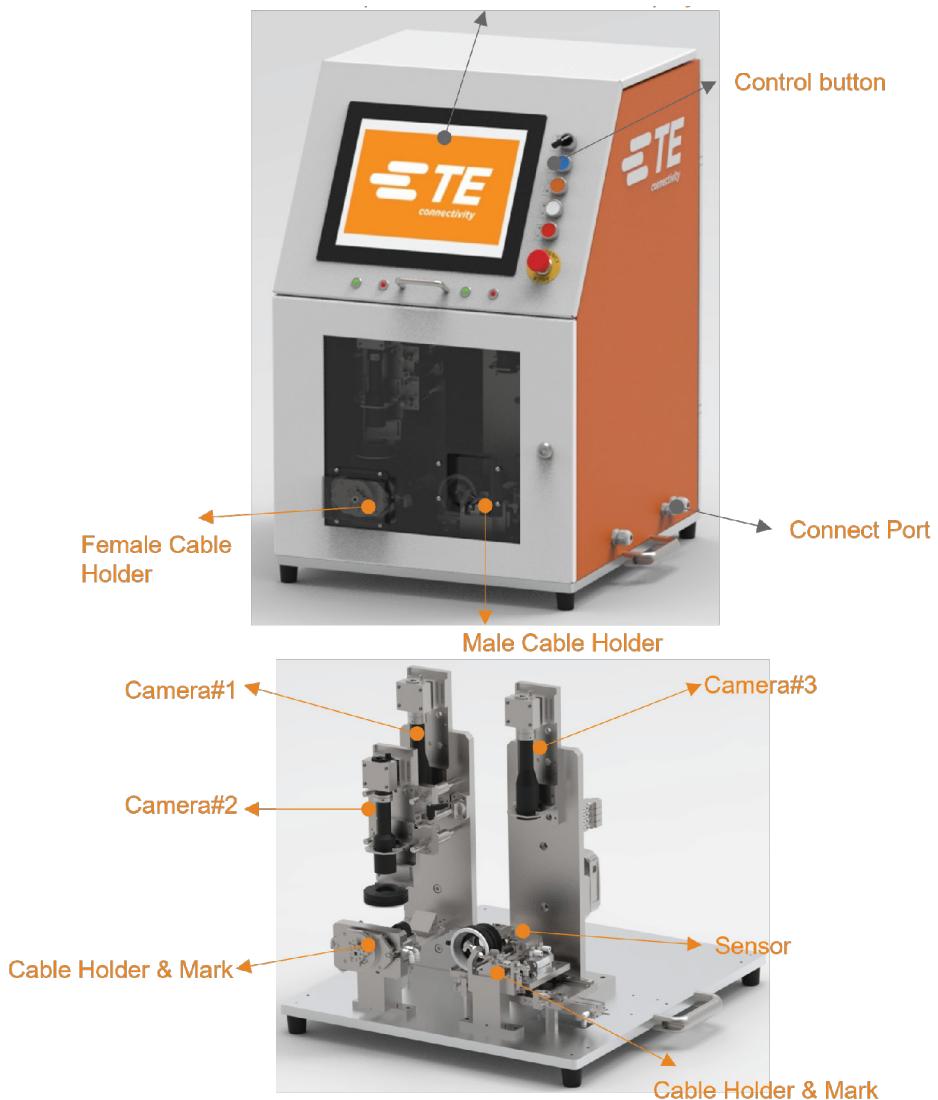

Ordering Information

Part Number	Part Description
PN 2450192-1	MATE-AX Female&Male Tradi Inspection Mach
PN 2450192-2	FAKRA Female&Male Vision Inspection Mach
PN 2450192-3	MATE-AX Female&Female Tradi Inspection Mach
PN 2450192-4	MATENET Female&Male Inspection Mach
PN 2465625-1	FAKRA Male VIM Md Cam+IPC+SW
PN 2465625-2	FAKRA Female VIM Md Cam+IPC+SW
PN 2465625-3	MATE-AX Male VIM Md Cam+IPC+SW
PN 2465625-4	MATE-AX Female VIM Md Cam+IPC+SW
PN 2465625-5	MATENET Male VIM Md Cam+IPC+SW
PN 2465625-6	MATENET Female VIM Md Cam+IPC+SW
PN 2459118-1	FAKRA Male Vision Inspection Holder
PN 2459118-2	FAKRA Female Vision Inspection Holder
PN 2459118-3	MATE-AX Male Vision Inspection Rt Holder
PN 2459118-4	MATE-AX Female Vision Inspection Rt Hder
PN 2459118-7	MATENET Male Vision Inspection Holder
PN 2459118-8	MATENET Female Vision Inspection holder

Connect With Us

Our tooling is supported by an established, experienced and responsive field service organization. TE Connectivity field engineers are located worldwide and are available to assist with on-site and remote service; selection and installation of new equipment; training; and technical support. Service agreements are available to provide protection and support for all your application tooling equipment.

Contact Us

Phone: Americas 1-800-722-1111
EMEA 49-6151-607-1518
APAC 86-021-3325-9030

Tooling Portfolio: tooling.te.com
Field Service: te.com/fieldservice

te.com

TE, TE Connectivity, TE connectivity (logo), and EVERY CONNECTION COUNTS are trademarks owned or licensed by the TE Connectivity plc family of companies. Other product names, logos, and company names mentioned herein may be trademarks of their respective owners.

The information given herein, including drawings, illustrations and schematics which are intended for illustration purposes only, is believed to be reliable. However, TE Connectivity makes no warranties as to its accuracy or completeness and disclaims any liability in connection with its use. TE Connectivity's obligations shall only be as set forth in TE Connectivity's Standard Terms and Conditions of Sale for this product and in no case will TE Connectivity be liable for any incidental, indirect or consequential damages arising out of the sale, resale, use or misuse of the product. Users of TE Connectivity products should make their own evaluation to determine the suitability of each such product for the specific application.

© 2025 TE Connectivity. All Rights Reserved.

09/25 Original